

THE W-CLASS PRINTER FROM DATAMAX

DMX-W-6208™, DMX-W-6308™ & DMX-W-8306™ PRODUCT SPECIFICATIONS




Consisting of the W-6208, W-6308, and W-8306 models, the W-Class line of bar code printers is equipped with a 32-bit 90 MHz Motorola Coldfire™ processor and 16 MB of standard memory. This provides accelerated first-label output and variable-data printing. All of the systems offer a wide range of connectivity options that support a variety of hosts including LANs and workstations. The three models are also backed by one of the strongest warranties in the industry, five years or 4 million inches on the printer which covers all parts and labor, and 1 year or 1 million linear inches on the printheads.

The W-6208 can print a 6.6-inch-wide 203-dpi image at 8 inches per second; the W-6308, a 6.4-inch-wide 300-dpi image at 8 inches per second; and the W-8306, an 8.5-inch-wide 300-dpi image at 6 inches per second. All of the printers are equipped with an adjustable-contrast LCD front-panel display that allows operators to select media, speed and temperature settings as well as network connectivity options. The LCD uses language prompts in either English, French, Italian, German, or Spanish.

Other standard features include an adjustable-pressure printhead, a side-door window for monitoring media supply levels, and a

media-sensing calibration unit that automatically adjusts the printers to handle various label sizes and types. All of the systems feature a tough all-metal chassis designed to withstand adverse work environments, making them ideal for heavy-duty industrial applications.

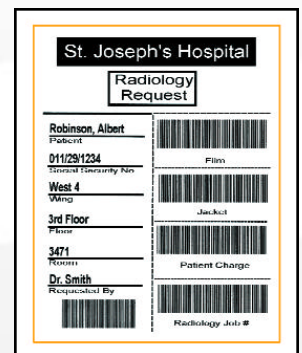

DATAMAX
W CLASS

Corporate Headquarters
4501 Parkway
Commerce Boulevard
Orlando, Florida USA 32808
(407) 578-8007
Fax (407) 578-8377
www.datamaxcorp.com

Datamax International
Herbert House
Elizabeth Way, Pinnacles
Harlow, Essex CM19 5FE UK
+44 1279 772200
Fax +44 1279 424448

Datamax Latin America
4501 Parkway
Commerce Boulevard
Orlando, Florida USA 32808
(407) 523-5520
Fax (407) 578-8377

Asia-Pacific Sales
19 Loyang Way
#01-01 CILC Building
Singapore 508724
+65 542-2611
Fax +65 542-3611

DMX-W-6208™, DMX-W-6308™ & DMX-W-8306™ PRODUCT SPECIFICATIONS



	W-6208	W-6308	W-8306
PRINT SPEED	8IPS	8IPS	6IPS
RESOLUTION	203dpi	300dpi	300dpi
MAXIMUM PRINT WIDTH	6.61"	6.4"	8.5"
MEDIA WIDTH	2.0"-6.7"	2.0"-6.7"	3.0"-9.0"
DIMENSIONS	(H)14.8x(W)13.8x(D)18.5	(H)14.8x(W)13.8x(D)18.5	(H)14.8x(W)16.1x(D)18.5
WEIGHT	55 lbs.	55lbs.	65 lbs.
PRINTER TYPE	Direct Thermal or Thermal Transfer		
BAR CODE MODULUS	5 mil to 110 mil (203 dpi) "X" dimension in picket fence or ladder orientations/3.3 mil to 80 mil (300dpi)		
PRINT LENGTH	0.5" – 99" (12.7mm – 2515mm)		
MEDIA WINDOW	Clear side-door panel to easily monitor media supply levels		
MEDIA TYPE	Roll-fed or fan-fold materials, die-cut or continuous labels; perforated or continuous tag/ticket stock		
MEDIA THICKNESS	.0025" – .0100" (.064mm – .254mm)		
MEDIA SENSING	Adjustable "see through" for liner-backed die-cut labels or punched tags; left bias reflective sensor for media with black stripe sensing		
SUPPLY ROLL	8" (203mm) maximum diameter on 1.5" – 3" (38mm – 76mm) core. Fan-fold stock accepted from bottom or rear of printer		
LABEL BACKFEED	For use with optional cutter or peel/present mode		
RIBBONS	Industry-standard ribbon widths; 3" – 9", 1" (25mm) ribbon core, 1509' (460M) in length		
CABINET	Metal construction		
BAR CODES	Code 39, Interleaved 2 of 5, Code 128 (subsets A,B and C), Codabar, LOGMARS, UPC-A, UPC-E, UPC 2 & 5 digit addendums, EAN-8, EAN-13, EAN 2 & 5 digit addendums, UCC / EAN - 128 random weight, Code 93, MSI Plessey, Universal Shipping Container Symbology, Code 128 MOD 43, QR Code, Postnet, PDF 417, Micro PDF, UPS MaxiCode (mode 2 & 3), Datamatrix, Telepen, Aztec		
RESIDENT FONTS	Ten alphanumeric fonts from .035" (.89mm) to .64" (16.26mm) including OCR-A, OCR-B, DPL font 9 will be CG Triumvirate™ scalable font from AGFA®		
CHARACTER SET	Modified IBM® Code Page 850; includes characters for English and most European, Scandinavian and Spanish speaking countries		
FONT EXPANSION/ROTATION	All fonts expandable vertically and horizontally up to 24x; fonts and graphics can be printed in four directions: 0°, 90°, 180° and 270°		
GRAPHICS SUPPORT	.PCX, .BMP and .IMG files		
REVERSE FIELDS/MIRROR IMAGE	Any font or graphic field can be printed as a normal or reverse image		
MEMORY	2MB Downloadable Flash Program Memory 16MB DRAM memory		
IINTERFACES	Centronics® Parallel port (IEEE 1284 compliant), RS232 at 300 to 38,400 BPS, optional Ethernet, Optional rs422		
WINDOWS® DRIVER	Used for creating label formats using virtually any windows-based program. Included on Datamax Accessories CD, or via our web site at www.datamaxcorp.com		
POWER SOURCE	90-132 or 180-264 VAC @ 47-63 Hz; auto switching: specify power cord when ordering		
OPERATING TEMPERATURE	32°F to 104°F (0°C to 40°C)		
OPTIONS	(field-installable unless indicated differently)		
PRESENT SENSOR	Used for on-demand label dispensing		
CUTTER WITH TRAY	Maximum Thickness .010" (.254mm)		
INTERNAL REWIND	Full roll: 8" (103mm) OD capacity; label backing rewound in peel and present mode and liner rewound in batch mode with present sensor used for on-demand label dispensing (factory installed)		
EXTERNAL REWIND/UNWIND	12" (300mm) maximum OD capacity, 7.5" (237.5mm) wide		
MEMORY EXPANSION	PC card, Flash		
PASSPORT	Portable keyboard/display terminal provides interface for stand-alone printing		
NETWORK CONNECTIVITY	Micro Print Server allows multiple users on various platforms to share the same printer		
HOST SUPPORTED	<ul style="list-style-type: none"> • Novell NetWare • UNIX • Windows NT • LAN Manager • AppleTalk • DEC 		
PROTOCOLS SUPPORTED	<ul style="list-style-type: none"> • IPX • TCP/IP • LPR • LAT • NetBIOS/NetBEUI 		
ILPC FIRMWARE	<ul style="list-style-type: none"> • International Language Print Capabilities firmware allows printing of non-English character sets in over 40 languages • Kanji Gothic B, Chinese GB scalable Either require additional 2 Meg FLASH 		

AGFA | Monotype

